

Woodpeckers®

WHEEL MARKING GAUGE

W/ MICRO-ADJUST

OWNER'S MANUAL

I. BASIC OPERATION

- For rough positioning, loosen both Lock Knobs ③ ⑥ and slide the assembly along the shaft. Once set to your desired setting, lock both knobs.
- For precise fine tuning, use the micro-adjustment. Loosen the ③ Primary Lock Knob while keeping the ⑥ Micro-Adjust Lock Knob tight. Turn the ④ Knurled Micro-Adjust until you reach your exact setting, then re-tighten the ③ Primary Lock Knob.

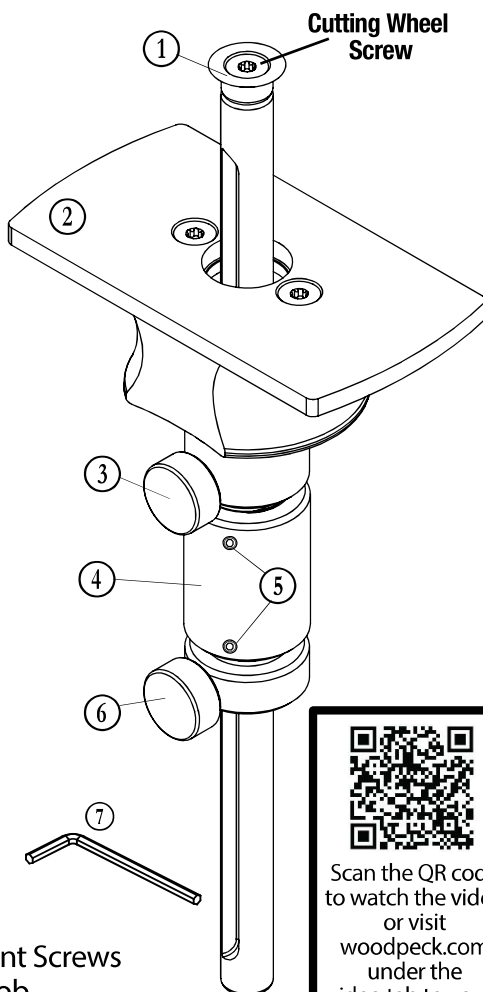


DIAGRAM NUMBER PART NAME

- | | |
|---|------------------------------|
| ① | Cutting Wheel |
| ② | Face Plate |
| ③ | Primary Lock Knob |
| ④ | Knurled Micro-Adjust |
| ⑤ | Nylon Drag Adjustment Screws |
| ⑥ | Micro-Adjust Lock Knob |
| ⑦ | Wrench |




Scan the QR code to watch the video or visit woodpeck.com under the video tab towards the bottom of the product page.

If you think you're missing anything, email us at mailroom@woodpeck.com. You can also call us at 800-752-0725 from 9:00 a.m. to 4:00 p.m. EST Monday - Friday.

II. SHARPENING THE CUTTING WHEEL

Sharpen periodically to maintain crisp layout lines.

1. To sharpen the ① Cutting Wheel, first remove the cutting wheel screw using the ⑦ Wrench.
2. Place the Cutting Wheel with the large, flat side down on the face of the stone.
3. Press down on the wheel with your finger and move the Cutting Wheel in a figure-8 pattern until the blade is sharpened. *Figure A.*
4. Re-install the Cutting Wheel onto the shaft and tighten the cutting wheel screw securely.

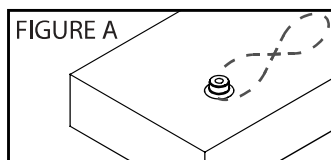

III. MARKING YOUR STOCK

1. Determine the dimension you wish to mark, whether nominal or the thickness of mating pieces for traditional joints.
2. Align the Face Plate to one surface and the face of the Cutting Wheel to your desired dimension (See Part I).

Figure B.

3. With the Face Plate referencing the edge of your board, draw the gauge along the length of the edge to scribe your line. *Figure C.*

4. The Face Plate can be removed by loosening the two Screws. This allows access in areas where the Face Plate might otherwise interfere. *Figure D.*

5. You can also install the Face Plate 90° from its original installation. This is great for increased reference surface on narrow stock. *Figure D.*

FIGURE B

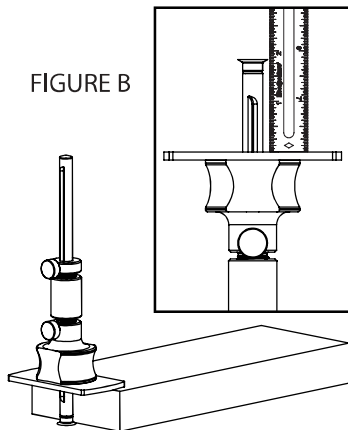


FIGURE C


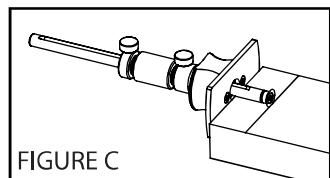


FIGURE D

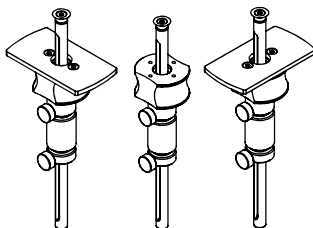

PRO TIP

Make a light initial pass, then make successive passes to make the cut mark as deep as you'd like.

Woodpeckers®

Woodpeckers, LLC Strongsville, Ohio

woodpeck.com

© 2026 Woodpeckers, LLC



woodpeck.com

At Woodpeckers we are constantly reviewing & improving our tools. The most current version of our instruction manuals are always available to download at woodpeck.com.

(Located in the bottom section of the tool's page under the "Additional Information" or "Instructions" tabs.)



Be the first to know all the new products, OneTIME Tools & sales by subscribing to our eClub. (Located at the top center of our webpage woodpeck.com.)



Subscribe to our YouTube channel to stay up-to-date on all the latest tool tips & tricks.



INTERACT WITH US! Follow us on Facebook, Instagram & TikTok!



Enjoy shop tips, project ideas, tool techniques & more in our Woodworking Resource Center/Blog. (Located at the bottom center of our webpage woodpeck.com.)



WARNING!

This product can expose you to chemicals, including chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm.

For more information go to www.P65Warnings.ca.gov