

Woodpeckers[®]

CORDLESS DRILL STATION

O W N E R ' S M A N U A L

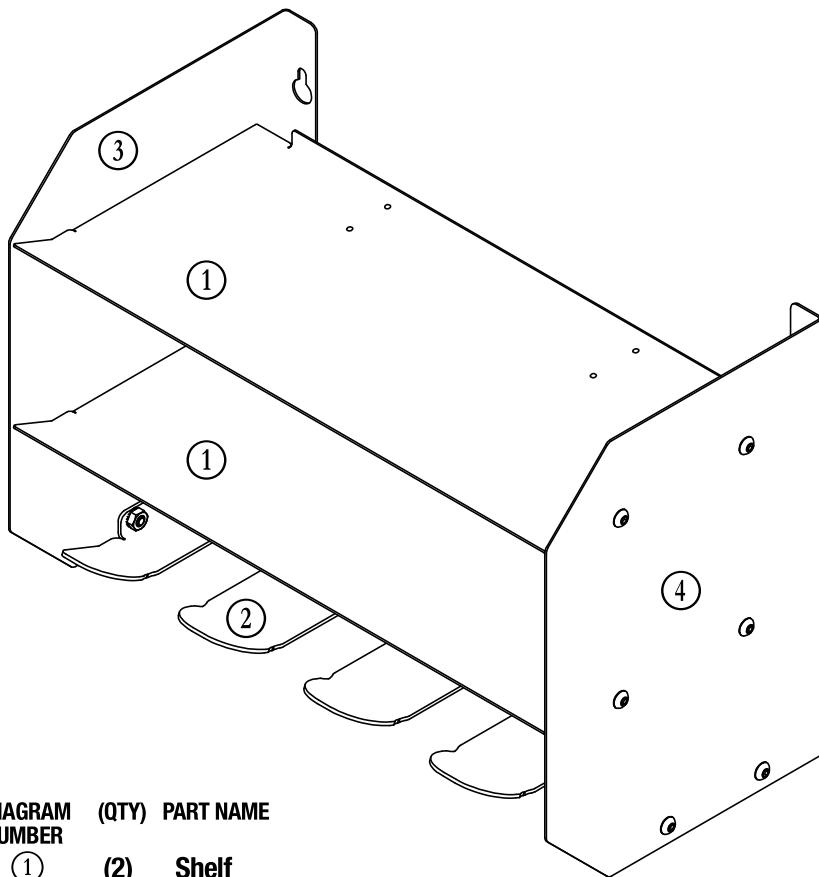



DIAGRAM NUMBER	(QTY)	PART NAME
①	(2)	Shelf
②	(1)	Cordless Drill Rack
③	(1)	Panel (Left)
④	(1)	Panel (Right)

HARDWARE BAG

A		(12)	1/4-20 x 3/8" Button Head Socket Cap Screws
B		(12)	1/4-20 Kep Nuts
C		(4)	#8 x 1-5/8" Wood Screws
D		(1)	5/32" Hex Key

*If you think you're missing anything, email us at mailroom@woodpeck.com.
You can also call us at 800-752-0725 from 9:00 a.m. to 4:00 p.m. EST Monday - Friday.*

FIGURE A

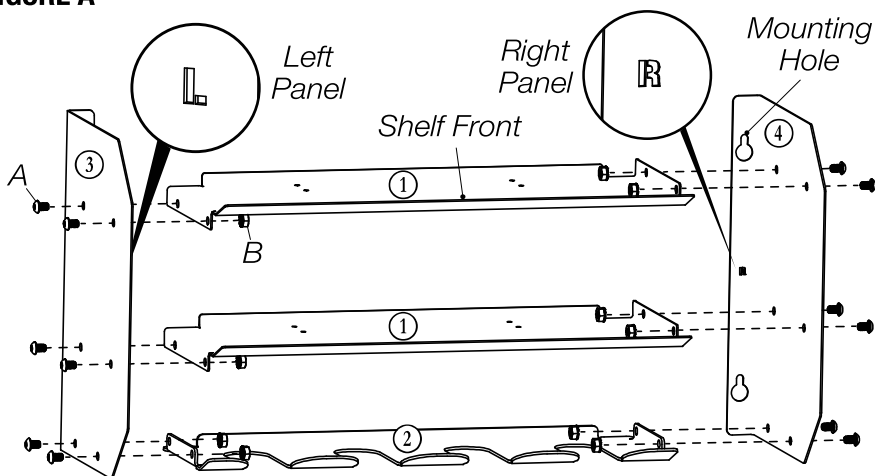

- Start by loosely attaching the ② Cordless Drill Rack and two ① Shelves to the left and right ③ ④ Panels using the *A* Button Head Socket Cap Screws and *B* Kep Nuts. See Figure A.
- Tighten all screws using the *D* 5/32" Hex Key.
- The weight of the Cordless Drill Station requires mounting to studs, plywood, or other sturdy backing. Do not use hollow wall anchors. If necessary, attach a piece of plywood between two studs and mount the Cordless Drill Station to the plywood backing.
- Find a suitable location. Level and mount the Cordless Drill Station to the wall using the *C* Wood Screws through the Mounting Holes.

Woodpeckers®

Woodpeckers, LLC Strongsville,
Ohio
woodpeck.com



woodpeck.com

At Woodpeckers we are constantly reviewing & improving our tools. The most current version of our instruction manuals are always available to download at woodpeck.com.
(Located in the bottom section of the tool's page under the "Additional Information" or "Instructions" tabs.)



Be the first to know all the new products, OneTIME Tools & sales by subscribing to our eClub. (Located at the top center of our webpage woodpeck.com.)



Subscribe to our YouTube channel to stay up-to-date on all the latest tool tips & tricks.



INTERACT WITH US! Follow us on Facebook, Instagram & TikTok!



Enjoy shop tips, project ideas, tool techniques & more in our Woodworking Resource Center/Blog. (Located at the bottom center of our webpage woodpeck.com.)